
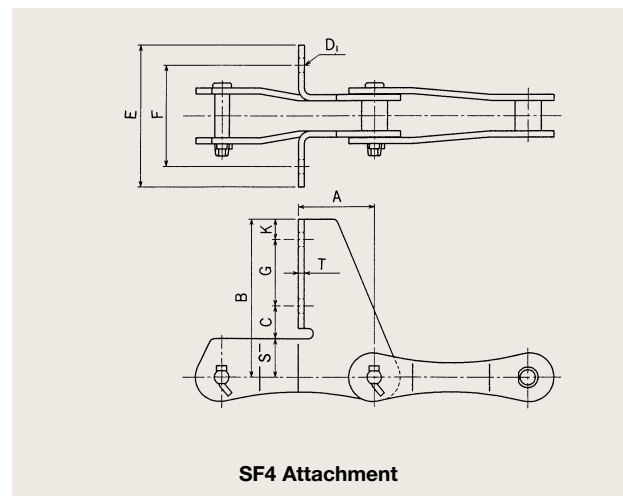


OSV type Stainless Chains

These offset chains, developed from HSS type and SAV type stainless steel chains, have the following features:

- As offset chains, they have superior wear resistance.
- They can be used with chain saver sprockets.
- Chains can be separated and joined in one link units.
- Compatible with HSS type and SAV type stainless chain.

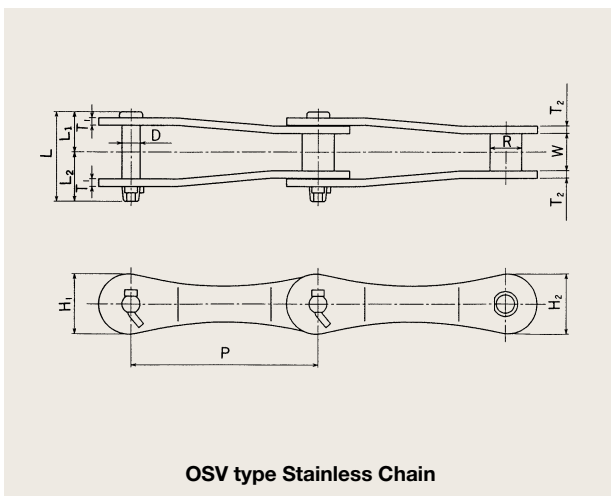

OSV type Stainless Chains

Chain No.	Pitch P (mm)	Bush Dia. R (mm)	Inner Width W (mm)	Pin			Link Plate		Average Tensile Strength		Assured Tensile Strength		Mass (kg/m)	
				Dia. D (mm)	Length		Height H (mm)	Thickness T (mm)	(kN)	(kgf)	(kN)	(kgf)		
					L (mm)	L ₁ (mm)								L ₂ (mm)
OSV15215-B	152.4	26	30	14.5	72	32.5	39.5	48	6	147	15000	137	14000	5.7
OSV15219-B	152.4	26	30	14.5	72	32.5	39.5	48	6	186	19000	171	17500	5.7

SF4 Attachments

Chain No.	Dimensions (mm)										Added Mass per Attachment (kg)	Notes
	A	B	C	D ₁	E	F	G	K	S	T		
OSV15215	76	155	32	14	140	100	65	20	38	6	1.3	Standard type
	76	155	38	14	140	100	60	34.5	22.5	6	1.1	Equivalent to 720
	76	155	40	14	140	100	75	17.5	22.5	6	1.2	Equivalent to 730
	76	155	40	14	140	112	60	32.5	22.5	6	1.1	Equivalent to S730
OSV15219	76	155	32	14	140	100	65	20	38	6	1.3	Standard type
	76	155	38	14	140	100	60	34.5	22.5	6	1.1	Equivalent to 720
	76	155	40	14	140	100	75	17.5	22.5	6	1.1	Equivalent to 730
	76	155	40	14	140	112	60	32.5	22.5	6	1.1	Equivalent to S730