


Cast Chains

Drag Chains


Drag chains are designed with wear resistant structures, using heavy, wide bottomed links. Use SD drag chains when particularly high wear resistance is required.

DC type

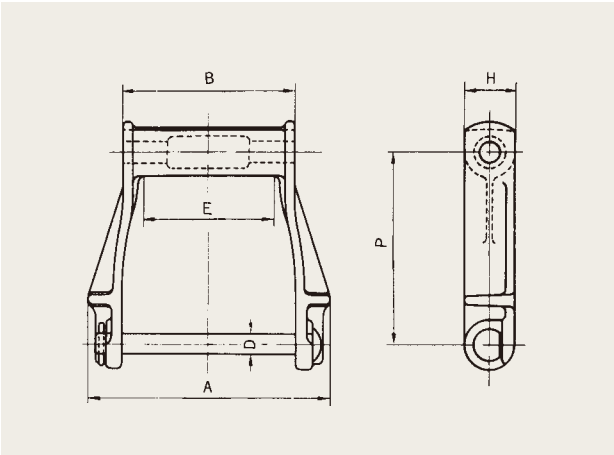

Chain No.	Pitch P		Dimensions (mm)					Average Tensile Strength		Maximum Allowable Strength		Mass (kg/Link)
	(mm)	(in)	A	B	D	E	H	(kN)	(kgf)	(kN)	(kgf)	
DC613	152.4	6	314	270	16	240	38	143	14600	18.6	1900	3.31
DC816	203.2	8	422	368	19	330	45	194	19800	28.4	2900	7.20

SD type

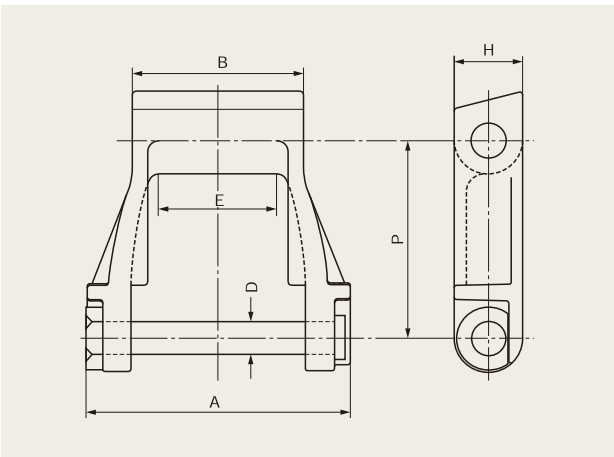

Chain No.	Pitch P		Dimensions (mm)					Average Tensile Strength		Mass (kg/Link)
	(mm)	(in)	A	B	D	E	H	(kN)	(kgf)	
SD-19 Special	152.4	6	204	133	25.4	93	51	509	52,000	5.6
SD-21S	228.6	9	406	325	32	250	74	323	38,000	17.8