




Chains for Special Applications

HW type Conveyor Chains for Use in Garbage Incinerator Equipment

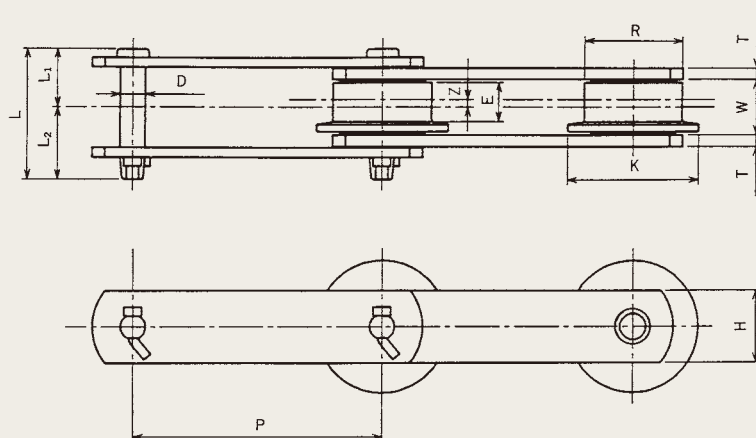

Chain No.	Pitch P (mm)	Roller				Inner Width W (mm)	Pin			Link Plate		Average Tensile Strength		Mass (kg/m)	
		Outer Dia. R (mm)	Face Width E (mm)	Flange Dia. K (mm)	Offset Z (mm)		Dia. D (mm)	Length			Height H (mm)	Thickness T (mm)			
								L (mm)	L1 (mm)	L2 (mm)			(kN)		(kgf)
HW10108-F	101.6	44.5	18	55	2.5	27	11.1	63.0	30.0	33.0	28.6	6.3	78.5	8000	6.9
HW15208-F	152.4	50.8	20	65	3	30	11.1	66.0	31.5	34.5	38.0	6.3	78.5	8000	8.1
HW15011-F	150	50.8	20	65	3.5	30	14.3	68.0	32.0	36.0	38.0	6.3	112.8	11500	7.7
HW15215-F	152.4	57.2	25	75	3.5	37.1	15.8	87.5	40.0	47.5	44.5	7.9	186.3	19000	12.4
HW20015-F	200	65	24	85	4	37.1	15.8	87.5	40.0	47.5	44.5	7.9	186.3	19000	11.5
HW25015-F	250														10.4
HW20019-F	200	80	34	105	5	51.4	18.9	111.3	51.5	59.8	50.8	9.5	245.2	25000	20.0
HW25019-F	250														17.3
HW30019-F	300														15.7
HW30026-F	300	100	38	130	6	57.2	22.1	119.6	55.4	64.2	63.5	9.5	313.8	32000	24.0