


Standard Conveyor Chains

Standard Conveyor Chains (S Roller type)

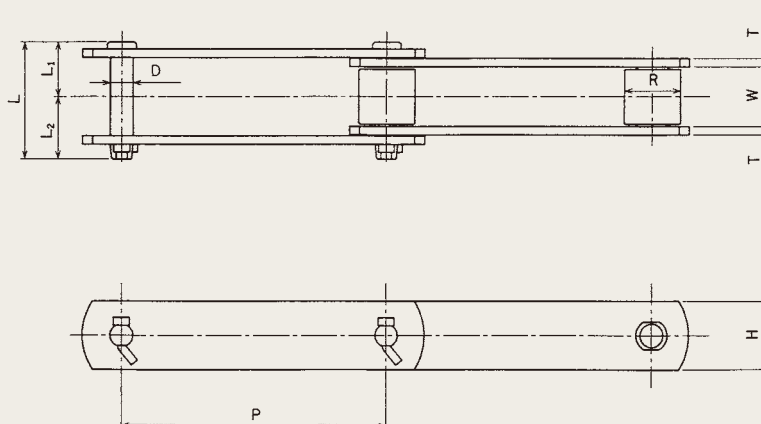

Chain No.	Pitch P (mm)	Roller Outer Dia. R (mm)	Inner Width W (mm)	Pin				Link Plate		Average Tensile Strength		Mass (kg/m)
				Dia. D (mm)	Length			Height H (mm)	Thickness T (mm)			
					L (mm)	L ₁ (mm)	L ₂ (mm)			(kN)	(kgf)	
HRS03075-S	75	19.05	18.0	7.94	38.0	18.0	20.0	22.0	3.2	29.4	3000	2.0
HRS03100-S	100											1.8
HRS03150-S	150											1.4
HRS05075-S	75	22.2	22.2	11.11	51.0	24.0	27.0	32.0	4.5	68.6	7000	4.2
HRS05100-S	100											3.8
HRS05150-S	150											3.3
HR10105-S	101.6	20.1	22.2	9.53	51.0	24.0	27.0	25.4	4.8	53.9	5500	3.0
HR6608-S	66.27	22.2	27.0	11.11	63.0	30.0	33.0	28.6	6.3	83.3	8500	5.6
HR10108-S	101.6											4.6
HR15208-S	152.4	25.8	30.0		66.0	31.5	34.5	38.0				5.7
HR10011-S	100	30.0	30.0	14.29	68.0	32.0	36.0	38.0	6.3	112.7	11500	7.0
HR15011-S	150											5.9
HR7813-S	78.11	31.75	36.5	14.29	81.5	39.0	42.5	38.0	7.9	117.6	12000	10.3
HR10113-S	101.6		31.0	15.88	78.5	37.0	41.5			137.2	14000	8.7
HR15215-S	152.4	34.93	36.5	15.88	85.5	39.5	46.0	45.0	7.9	186.2	19000	9.3
HR20015-S	200											8.4
HR25015-S	250											7.8
HR15219-S	152.4	40.08	36.5	19.05	96.1	43.8	52.3	50.8	9.5	245.0	25000	12.6
HR20019-S	200		50.8	19.05	110.5	51.0	59.5					12.0
HR25019-S	250											11.1
HR30019-S	300											10.5
HR20026-S	200	44.5	57.2	22.1	119.6	55.4	64.2	63.5	9.5	313.8	32000	16.5
HR25026-S	250											14.8
HR30026-S	300											14.2
HR45026-S	450											12.5
HR30048-S	300	50.8	66.7	25.3	143.7	67.6	76.1	76.2	12.7	475.6	48500	23.3
HR45048-S	450											20.6
HR60048-S	600											19.2
HR30054-S	300	57.2	77.0	31.6	169.3	81.6	87.7	76.2	16.0	529.6	54000	29.9
HR45054-S	450											26.3
HR60054-S	600											24.4